



NPS-61-81-002

# NAVAL POSTGRADUATE SCHOOL Monterey, California





TECHNICAL REPORT

ATMOSPHERIC OPTICAL PROPAGATION
COMPARISONS DURING MAGAT-80

C. W. FAIRALL,

G. E. SCHACHER and K. L. DAVIDSON

Environmental Physics Group

Approved for public release; distribution unlimited

Prepared for: Naval Ocean System Center San Diego, California 92152

81 4

2 012

# NAVAL POSTGRADUATE SCHOOL Monterey, California

Rear Admiral J. J. Ekelund Superintendent

D. A. Schrady Acting Provost

The work reported herein was supported in part by the U.S. Navy EO/MET Program through the Naval Ocean Systems Center, San Diego, California.

Reproduction of all or part of this report is authorized.

This report was prepared by:

Professor of Physics

Associate Professor of

Meteorology

BDM Corporation

Approved by:

Chairman

Department of Physics and

Chemistry

Haltiner, Chairman Department of Meteorology

Dean of Research

SECURITY CLASSIFICATION OF THIS PAGE (When Date Entered)	
REPORT DOCUMENTATION PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM
NPS-61-81-892 / A - A 9H	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle)	S. TYPE OF REPORT & PERIOD COVERED
Atmospheric Optical Propagation Comparisons During MAGAT-89	Technical Report
7. AUTHOR(A	S. CONTRACT OR GRANT NUMBER(s)
C. W./Fairall, G. E./Schacher and K. L./Davidson	(16) 459557
9. PERFORMING ORGANIZATION NAME AND ADDRESS	10. PROGRAM ELEMENT, PROJECT, TASK
Naval Postgraduate School, Code 61Sq / Monterey, California 93940	N6600180WR00192
Naval Ocean Systems Center 12,45	Nov
San Diego, California 92152	18. NUMBER OF PAGES
14. MONITORING AGENCY NAME & ADDRESS(II dillorent from Controlling Office)	36 18. SECURITY CLASS. (of this report)
	Unclassified  18a DECLASSIFICATION/DOWNGRADING SCHEDULE
17. DISTRIBUTION STATEMENT (of the abetract enforced in Block 20, if different free	n Report)
18. SUPPLEMENTARY NOTES	<del></del>
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)	
Optical Propagation, aerosol extinction, t	urbulence

DD 1700 1473 EDITION OF ! NOV 65 IS OBSOLETE S/N 0102-014-4601 |

\* BDM Corp. Contract Employee

SECURITY CLASSIFICATION OF THIS PAGE (This But British

25745)

LLURITY CLASSIFICATION OF THIS PAGE(When Date Entered) CONTINUED BLOCK #20 - alpha were measured optically on a 13.3 km path across Monterey Bay.

Can also be calculated from micrometeorological data
(derosol spectra, turbulence and mean meteorological parameters). This report is a compilation of the preliminary analysis of path-averaged (aircraft) and midpoint (ship) micrometeorological data, including calculations of the relevant optical parameters for comparison with the optical measurements.

# TABLE OF CONTENTS

	Page #
List of Figures	
List of Tables	
A. Introduction	1, 2
B. Background 1. Optical Parameters 2. Turbulence Scaling Parameters 3. Bulk Parameterization	2, 3 3, 4 4, 5
C. Instrumentation 1. Aerosol 2. Aircraft Meteorology	5 5
D. Analysis 1. Aerosol 2. Micrometeorology 3. Optical Data	6 8 8
<ul> <li>E. Results</li> <li>1. Aircraft C<sub>N</sub><sup>2</sup> Evaluation</li> <li>2. Aircraft Extinction Comparison</li> <li>3. Ship Extinction Comparison</li> </ul>	10 10 15
APPENDICES	
A. Aircraft bulk meteorology and turbulence data on optical path in Monterey Bay.	27
B. Summary of aircraft optical measurements in Monterey Bay.	30
BIBLIOGRAPHY	

INITIAL DISTRIBUTION LIST

Accession For	
NTIS GRA&I	_
DTIC TAB	
Un expectationed []	
Justification	
-	
Fy	
Distribution/	
Avail ' Dity Codes	
Avl and/or	
Dist   lpseinl	
A	

#### **ABSTRACT**

There are three atmospheric processes responsible for the degradation of the transmission of optical images and electro-optical energy: aerosol extinction, molecular absorption, and turbulent distortion (scintillation and beam wander). As a part of the Marine Aerosol Generation and Transport experiment (MAGAT-80), light transmission characteristics (refractive-index structure function parameter,  $C_N^2$ , and total extinction coefficient,  $\alpha$ ) were measured optically on a 13.3 km path across Monterey Bay.  $C_N^2$  and  $\alpha$  can also be calculated from micrometeorological data (aerosol spectra, turbulence and mean meteorological parameters). This report is a compilation of the preliminary analysis of path-averaged (aircraft) and midpoint (ship) micrometeorological data, including calculations of the relevant optical parameters for comparison with the optical measurements.

#### LIST OF FIGURES

### FIGURE

- Ratio of ship to aircraft aerosol extinction coefficients. The horizontal lines represent the factors used to correct the aircraft values to agree with the ship.
- 2. Location of the 13.3 Km optical path in Monterey Bay. The square indicates the R/V ACANIA operating area for optical comparisons.
- 3. Comparison of aircraft turbulence  $C_N^2$  values (x) and optically measured  $C_N^2$  values (0) with  $C_N^2$  calculated using the bulk method. The dark solid line indicates perfect agreement and the lighter lines indicate factor of two limits.
- Comparison of optically measured extinction coefficient and aerosol size spectra extinction coefficient from aircraft optical path data.
- 5. a. Time series plot of aerosol extinction coefficient from optical measurements (lines) and aerosol size spectra (x and o), for 4/29.
  - b. Same as 5a for 5/2.
  - c. Same as 5a for 5/4.
  - d. Same as 5a for 5/5.
  - e. Same as 5a for 5/6.
  - f. Same as 5a for 5/8.
  - q. Same as 5a for 5/9.
- 6. a. Comparison of aerosol extinction coefficient from optical and ship aerosol size spectral measurements at  $\lambda$  = 0.63  $\mu$ 
  - b. Same as 6a for  $\lambda$  = 0.84  $\mu$

  - c. Same as 6a for  $\lambda$  = 1.03  $\mu$  d. Same as 6a for  $\lambda$  = 1.06  $\mu$

# LIST OF TABLES

# TABLE

- I Aircraft micrometeorological data.
- II Ratio of ship to aircraft extinction coefficient values.
- III Aircraft optical path bulk data and scaling parameters.

#### A. INTRODUCTION

Light propagating through the atmosphere is not only scattered and absorbed by aerosols and molecules, but the wavefronts are deflected and distorted by turbulence. The evaluation and application of optical, electro-optical, and laser systems requires reliable data and a tested physical model of these atmospheric effects.

NPS personnel recently participated in a large-scale field experiment designed to improve and verify certain overwater models of these atmospheric processes for the U.S. Navy. The experiment, Marine Aerosol Generation and Transport (MAGAT), was the brainchild of Professors Kenneth L. Davidson and Gordon E. Schacher of the Environmental Physics Group at the Naval Postgraduate School (NPS) in Monterey, California.

Other government installations involved in the planning of the experiment were the Naval Ocean Systems Center and the Naval Environmental Prediction Research Facility. The Electro-Optics/Meteorology (EO/MET) Program, the High Energy Laser (HEL) Program, and the Naval Air Systems Command provided funding for the project. MAGAT was held from April 28 to May 9, 1980, in the vicinity of Monterey Bay.

The first phase of the experiment dealt with the compatibility of optical and micrometeorological propagation theory. In cooperation with the NPS Physics Department, Optical Propagation Group, direct measurements of optical extinction and scintillation across Monterey Bay were compared with both marine surface layer model predictions and aerosol and turbulence data obtained at the midpoint of the optical path from the Research Vessel R/V ACANIA. In addition, path averages of aerosols and turbulence were obtained by flying an instrumented aircraft

the entire length of the 13.3 kilometer optical path at altitudes varying from 3.5 to 20 meters above the sea surface. The aircraft measurements were made in cooperation with Airborne Research Associates of Boston, Massachusetts. This report is a preliminary analysis of the aircraft and ship measurements for the first phase.

The second phase of the experiment involved an ambitious attempt to extend dynamic models of the evolving marine atmospheric boundary layer to include aerosol and turbulence profiles. This phase of the experiment, conducted in a region 30 to 50 nautical miles off the coast of Monterey, required periodic monitoring of aerosol and micrometeorological variables from the surface to 5 kilometers. These duties were shared by the aircraft and the R/V ACANIA (which utilized various remote sensing techniques). The analysis of the second phase of the aircraft measurements will be covered in a separate report.

#### B. BACKGROUND

# 1. Optical Parameters

The two atmospheric optical properties of primary interest are total extinction and refractive—index structure function parameter,  $C_N{}^2$ . The extinction has several components: molecular scattering and absorption ( $\alpha = \beta_S + \beta_A$ ) and aerosol scattering and absorption ( $\alpha = \alpha_S + \alpha_A$ ). Thus, the extinction parameterizes the loss of light energy as it is scattered out of the beam or absorbed by the molecular and particulate constituents of the atmosphere. The distortion and tilt of image wave fronts by atmospheric turbulence is parameterized by  $C_N{}^2$ .

We can write  ${\rm C_N}^2$  as a function of temperature  $({\rm C_T}^2)$  and water vapor  $({\rm C_O}^2)$  turbulence structure function parameters

$$C_N^2 = (79 \times 10^{-6} \text{ P/T}^2)^2 (C_T^2 + 0.113 C_{TQ} + 3.2 \times 10^{-3} C_Q^2)$$
 (1)

where P is the pressure in mb, T the absolute temperature and  $C_{TQ}$  the temperature-humidity cospectral structure function parameter.  $C_N^2$  can be obtained in three ways: 1) optical measurement, 2) measurement of  $C_T^2$ ,  $C_{TQ}$ , and  $C_Q^2$ , and 3) calculation of  $C_T^2$ ,  $C_{TQ}$ , and  $C_Q^2$  from bulk meteorological data (water temperature, air temperature, humidity and wind speed).

The total extinction  $(\alpha + \beta)$  can be measured optically by determining the reduction in beam intensity over some suitable optical path. The separate components can be calculated from micrometeorological data. The molecular extinction can be obtained from the LOWTRAN model developed by the Air Force Geophysics Laboratory (Selby et. al, 1978). The aerosol extinction can be calcualted from the aerosol spectral density, N(r).

$$\gamma = \int_0^\infty \pi r^2 E(n,\lambda) \ N(r) \ dr \tag{2}$$
 where r is the particle radius,  $E(n,\lambda)$  the total scattering efficiency at wavelength,  $\lambda$ , and refractive—index, n.

#### 2. Turbulence Scaling Parameters

Since the details of surface layer scaling are covered in previous reports (Fairall, et. al., 1980) this discussion will be limited to a few basic definitions. Near the surface, the height above the surface, z, can be normalized by the Monin-Obukhov stabiltiy length, L. We can then represent the micrometeorological properties in terms of scaling parameters and dimensionless functions of  $\xi = 2/L$ ,

$$C_{\rm T}^2 = T_{\star}^2 z^{-2/3} f(\xi)$$
 (3a)

$$C_0^2 = Q_*^2 z^{-2/3} Af(\xi)$$
 (3b)

$$C_{TQ} = r_{TQ} T_{*Q*} z^{-2/3} A^{1/2} f(\xi)$$
 (3c)

where T\* and Q\* are the temperature and humidity scaling parameters,  $f(\xi)$  is a dimensionless function (Wyngaard et. al., 1971),  $r_{TQ}$  is the temperature-humidity correlation parameter (about 0.8) and A is a constant (about 0.6).

The rate of dissipation of turbulent kinetic energy,  $\xi$ , can be similarly represented

$$\varepsilon = \frac{u_k}{KZ} g(\xi) \tag{4}$$

where  $u^*$  is the friction velocity and K is Von Karman's constant (0.35). The scaling length is given by

$$L = \frac{T}{qK} - \frac{u^2}{(T_* + 0.61 TQ_*/\rho)}$$
 (5)

where g is the acceleration of gravity and  $\rho$  is the density of air.

Note that the scaling parameters are related to the surface fluxes of momentum ( $\tau$  = Reynolds stress), temperature ( $Q_{\bullet}$ ) and water vapor ( $M_{\bullet}$ )

$$\tau = \rho u \star^2 \tag{6a}$$

$$Q_{o} = -u*T* \tag{6b}$$

$$M_{o} = -u*Q* \tag{6c}$$

#### 3. Bulk Parameterization

Although the scaling parameters can be determined from either direct flux measurements or from measurements of  $C_T^2$ ,  $C_Q^2$ , and  $\varepsilon$ , the difficulty of these measurements has led to the development of a method that utilizes bulk meteorological quantities (wind speed, u, temperature, T, and water vapor density, Q). In this case, the scaling parameter for X (X = u,T,Q) is obtained from the difference in X from

the sea surface  $(\mathbf{X}_{\mathbf{S}})$  to some reference height (usually  $10\mathrm{m}$ ) in the atmosphere.

$$X_{*} = C_{*}^{\frac{1}{2}} (X_{10} - X_{s}) \tag{7}$$

where  $c_{\rm X}$  is the drag coefficient for x (typically,  $c_{\rm X}=1.3\times 10^{-3}$  over the ocean). Further details on the bulk method can be found in Davidson et. al. (1980).

# C. INSTRUMENTATION

## 1. Aerosol

The aerosol spectra were measured with optical particle counters made by Particle Measurement Systems (PMS) of Boulder, Colorado. The R/V ACANIA used the standard NPS system consisting of two probes, the classical scattering (CSAS) and the active scattering (ASAS), controlled by a DAS-32 with computer interfacing. This system measures aerosols in 90 size channels from  $0.09\mu$  to  $14.0\mu$  radius. The aircraft aerosol data were obtained using a PMS model ASSAP on loan from NOSC. This system has 60 size channels from  $0.28\mu$  to  $14.0\mu$  radius.

# 2. Aircraft Meteorology

The aircraft micrometeorological parameters are logged on a computer controlled (HP9835) twenty channel data acquisition system. Each parameter is sampled every 2.5 seconds with a two-scan average stored every 5 seconds. The data is stored on magnetic tape cassette with a four hour capacity. A brief description of the micrometeorological data is given in Table 1. Further details on aircraft instrumentation can be found in Fairall (1979).

#### D. ANALYSIS

#### 1. Aerosol

The aerosol analysis techniques for the ship and aircraft are basically the same. The N(r) spectrum is calculated for half-hour averages on the ship and path averages for the aircraft (about 2 minutes). The spectrum is fit in LOG(N(r)), LOG(r) space with a seventh order polynomial for  $0.09\mu < r < 7\mu$ , with a linear fit for  $r > 7\mu$ . The extinction is calculated using these fits for  $0.03\mu < r < 30\mu$  on the ship and for  $0.1\mu < r < 15\mu$  for the aircraft. This calculation is discussed in depth in Schacher etal. (1980).

The method was developed for the ship system and adapted for use with the aircraft. Because of the greater statistical scatter in the N(r) spectrum from the aircraft probe, the polynomial fit is subject to occasional "instabilities". Should this occur, the polynomial fit will bear no resemblance to the N(r) data. Another symptom of this instability is the occurrence of large polynomial coefficients. Due to the preliminary nature of this report, the data have been left unedited. The reader is cautioned to use common sense when attempting to use these results.

The aircraft and ship aerosol extinctions were compared in a series of flybys. Since the ship system is newer, has a wider range, better sensitivity and is better understood, we decided to correct the aircraft extinctions to agree with the ship. The correction factors are given in Table II.

TABLE I. Aircraft Meteorological Data

Channel	Data Symbo	1	Sensor
1	Pressure	P	National Semiconductor
2	Temperature	T	Platinum resistor
3	Temperature	T	Vortex (NRL)
4	Dew Point	Td	Cooled mirror
5	Sea Surface T	T <sub>S</sub>	PRT-5 (IR)
6	Electric Field	E	Radioactive probe
7	-		
8	Refractivity	N	Microwave cavity (NAC)
9	Water Vapor Density	Q	Lyman-a, mean (NRL)
10	Air Speed	U	Hot wire, mean
11	Dissipation		Hot wire, fluctuation
12	N structure funct.	$C_N^2$	Microwave, fluctuation
13	T structure funct.	$c_{r}^{2}$	Microthermal, fluctuation
14	Q structure funct.	$c_Q^2$	Lyman-oc fluctuation
15	-		
16	-		
17	-		
18	-		
19	Electrical Conductivity	λ	Flat plate
20	-		

TABLE II. Ratio of Ship to Aircraft
Extinction Coefficient Values

Wavelength, µm	Before 5/4/80	After 5/3/80
0.63	3.8	1.8
0.84	5.2	2.0
1.06	7.1	2.5

These factors are based only on the open ocean comparisons. The Monterey Bay comparisons were not included so that the ship and aircraft optical comparisons could be considered independent. The complete set of correction factors is shown in Fig. 1.

## 2. Micrometeorology


The methods and equations used to obtain the basic parameters given in Table I have been described in Fairall (1979). Once these meteorological parameters are in hand, one can calculate the scaling parameters (Section B2) using either turbulence or bulk quantities. Since we did not have mean wind speed available for the aircraft, we did bulk calculations using a hybrid method where the dissipation rate,  $\varepsilon$ , is used to obtain  $u_*$  (Eq. 4).

## 3. Optical Data

The optical extinction cefficients, as obtained from the optics group, represent total extinction due to aerosols and air molecules. The molecular components were calculated using LOWTRAN IIIB and subtracted from the total to leave only the aerosol extinction. The LOWTRAN values used are given below

Wavelength, µm	0.63	0.84	1.03	1.06
Molecular 8. km-1	0.01	0.04	0.00	0.00

A description of the optical measurements is given by Crittenden et. al. (1980).

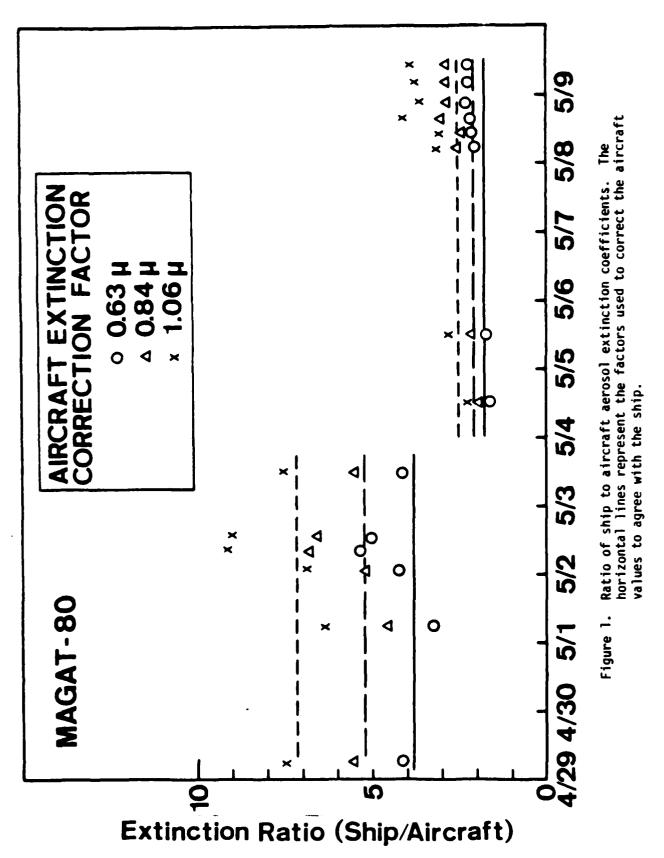

#### E. RESULTS

The measurements were made in Monterey Bay along a 13.3 km path from Pt. Pinos to Marina (Figure 2). The R/V ACANIA was located in the region indicated by the square. The aircraft made constant altitude passes along the optical path. Later in the experiment, several passes were made perpendicular to the path. The optical comparison was done on turbulence  $(C_N^2)$  and extinction (a). The optical and ship  $C_N^2$  comparison has already been reported (Davidson et. al., 1980) so it will not be discussed here.

# 1. Aircraft C<sub>N</sub><sup>2</sup> Evaluation

The basic aircraft optical path micrometeorological measurements and bulk calculations of scaling parameters are given in Table III. A more detailed printout is given in Appendix A. The bulk scaling predictions of  $C_N^2$  (Eq. 3 and Fig. 1) are compared with the turbulence measurements in Fig. 3. These results are similar to those obtained from the ship measurements (Davidson et. al., 1980).

# 2. Aircraft Extinction Comparison

A summary of the aircraft optical path extinctions is given in Appendix B. In Fig. 4 the aircraft aerosol comparison with the optical measurements is shown. Out of nineteen comparison runs (three wave-lengths each) only two disagree by more than a factor of two. For the aircraft aerosol data, the average ratio of extinction for aerosols versus optics is 1.0 + 50%, -40%.


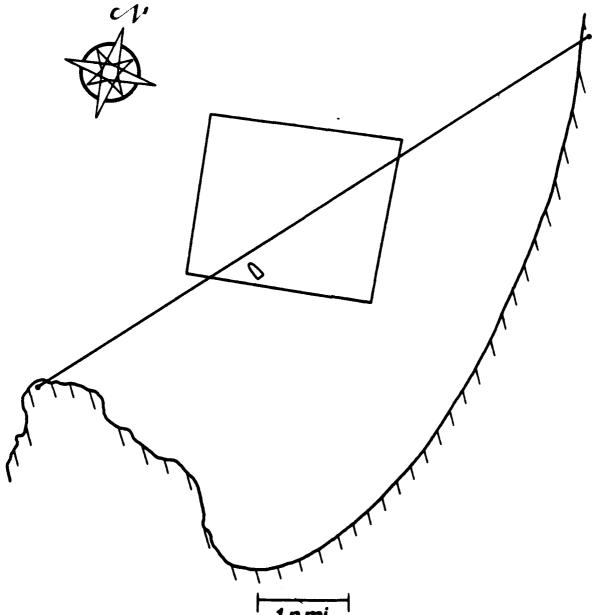


Figure 2. Location of 13.3 km optical path in Monterey Bay. The square indicates the R/V ACANIA operating area for optical comparisons.

TABLE III. Aircraft optical path bulk data and scaling parameters

-	99 N	30	0.1	-168	<u>.</u>	÷.	÷	100	-151	۳	7	6154	5477	1117	1. 4 to		<b>بر</b> : ب	١,,,١	9,1,7	. 1	39 (3)
* J	-,117		680'-	060	073	090	115	073	066		-, 107	-, 038	085	071	094	0.60	£ 60° ·	260	+ 80°	580°-	0.70
<u>*</u>	840	920					123	023	023	122	093	. 010	8001-	013	0.23	061	07B	550'-	043	0.5B	<b>\$00</b>
<b>*</b>	356	880'	701.	922.	. 188	. 212	.160	. 254	345	.114	128	. 528	. 322	419	, 453	2007	988	404	584	787	. <b>3</b> u2
7/7	-2.65E-01 -8.22E-02	3.32E-01	-1.03E+00	-9.26E-02	-2.00E-01	-1.07F-01	-1.71E+00	-6.49E-02	-6.61E-02	-1.32E+00	-8.041-01	1.611 - 0.5	-4.89L-02	-1.66E-02	-2.29E-02	-1.41k-01	1.72E-01	-5.16L 02	-4.43E-02	~7.51E-02	1.931-02
Sp	10.6	61.0	6.6	٠ ج	9.6	9.3	10.1	6.7	9.4	10.4	10.4	≎ }	6	4.4	6.7	6.6	10.1	10.0	3.3	5.01	1.0
ъ	2.5	(1) (2)	7.7	7.7	7.6	7.7	7.4	7.7	2.6	7.5	7.8	က အ	7.3	4.7	7.1	2.5	3.6	S' /	S. Y	æ 84	 æ
7.8	14.9	12.9	14.0		•	13.6	34.3	13.6	13.2	14.7	14.8	13.5	15.6	5.5.5	13.6	14.0	14 5				क । क
<del>;-</del>	12.4	13.7	11.9	12.3	12.2	12.2	11.3	13.0	12.6	11.7	12.5	13.8	12.9	12.8	13.0	12.4	12.1	17.71	12.7	13.8	14.5
AL.1	4 0 0 0	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	30	30	30	96	3.0
LIME	173155	170855	112320	140520	172112	190324	101320	164510	192825	94432	100018	165536	91440	120213	16 1510	123620	175750	1 មេខ២៥៣ ម	190132	1002001	1:4/50
1100	~ S.	m	4	ŗ	43	7	æ	>	10	11	12	1.5	14	1.5	16	). •	:2	3	?;	\$1.	
DAIE	04/29/80	05/01/80	US./02/80	08/05/80	05/05/80	08/20/50	08/50/50 12	08/03/80	08/03/80	05/04/80	68/50/59	08/50/50	08/90/50	08/90/50	08/96/30	0.57.0.77.80	02/05/06	03/80/50	68/80/56	95/34/76	115 / 10 / Att

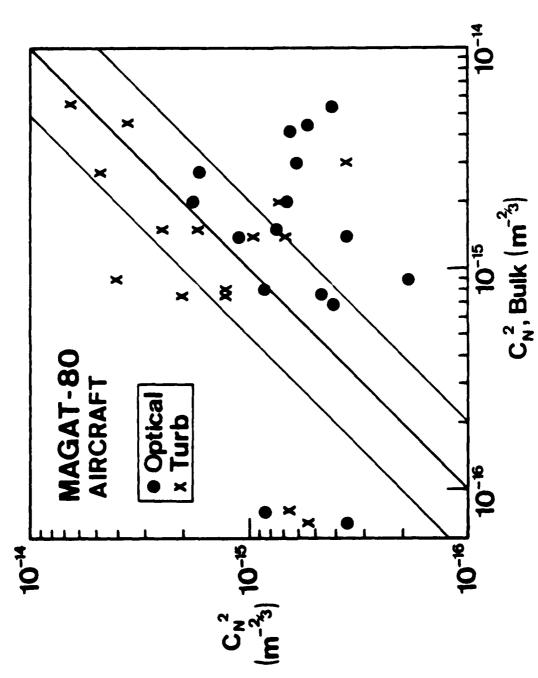

Comparison of airgraft turbulence  $C_N^2$  values (X) and optically measured  $C_N^2$  values (ullet) with  $C_N^2$  calculated using the bulk method. The dark solid line indicates perfect agreement and the lighter lines indicate factor of two limits. Figure 3.

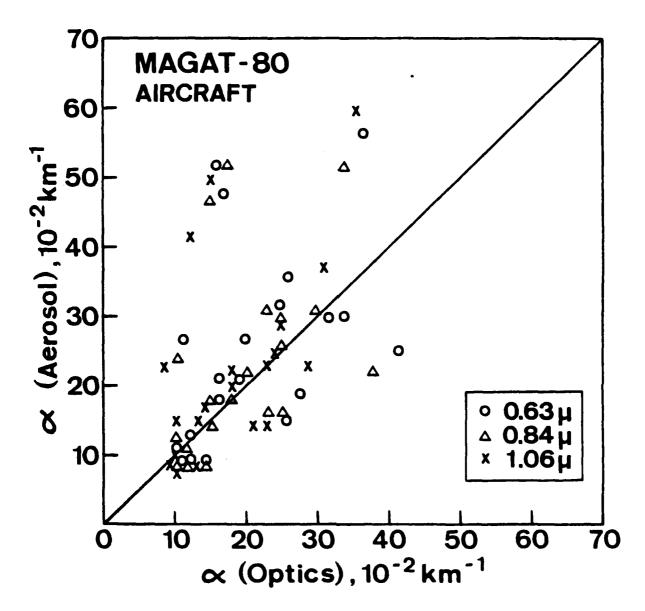


Figure 4. Comparison of optically measured extinction coefficient and aerosol extinction coefficient from aircraft optical path data.

# 3. Ship Extinction Comparison

The ship aerosol measurements were made at anchor along the optical path or underway within the square indicated in Fig. 2. Selected time series plots of extinction coefficients are given in Fig. 5a - 5g. Direct comparisons of size spectral and optical extinction values are given in Fig. 6a - 6d.

# Acknowledgements

The authors wish to acknowledge the participation of D. E. Spiel at BDM, Professors E. C. Crittenden, E. A. Milne, and A. W. Cooper, the Captain and crew of the R/V Acania and Dr. Ralph Markson and Jan Sedlaek of Airborne Research Associates.

D. Jensen and H. Hughes of the Naval Ocean System Center very kindly loaned us their airborne particle spectrometer, without which the aircraft measurements would not have been possible.

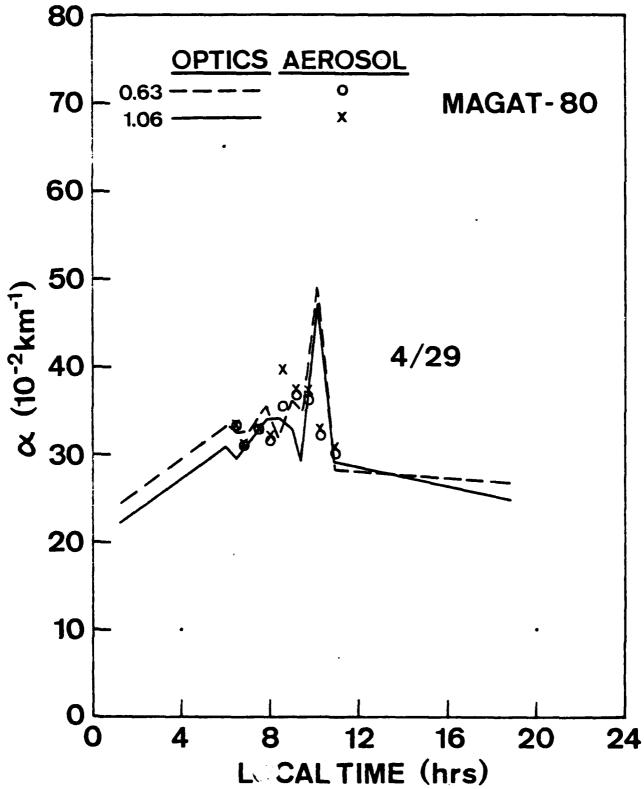


Figure 5a. Time series plot of aerosol extinctions coefficient from optical measurements (lines) and aerosol size spectra (X and 0).


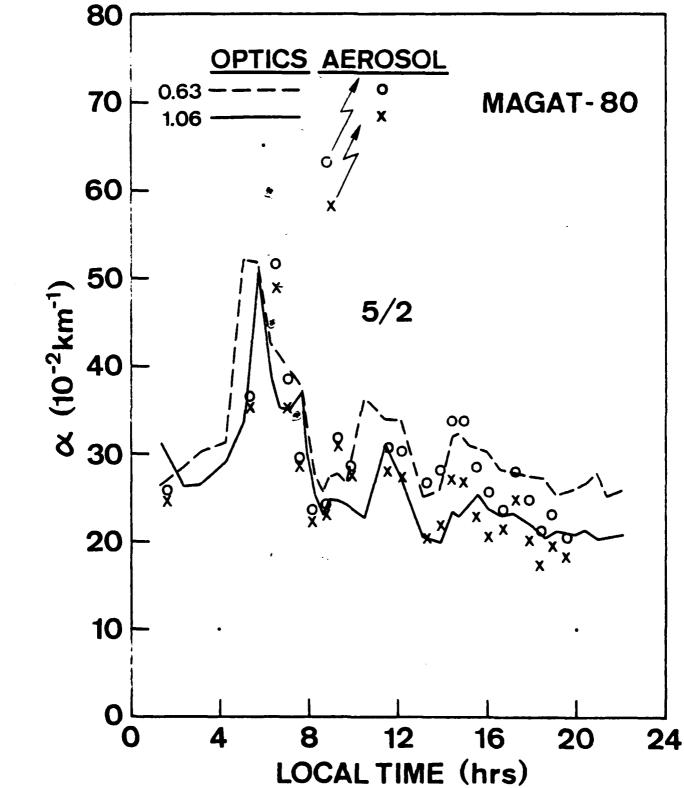


Figure 5b. Time series plot of aerosol extinctions coefficient from optical measurements (lines) and aerosol size spectra (X and 0). 17

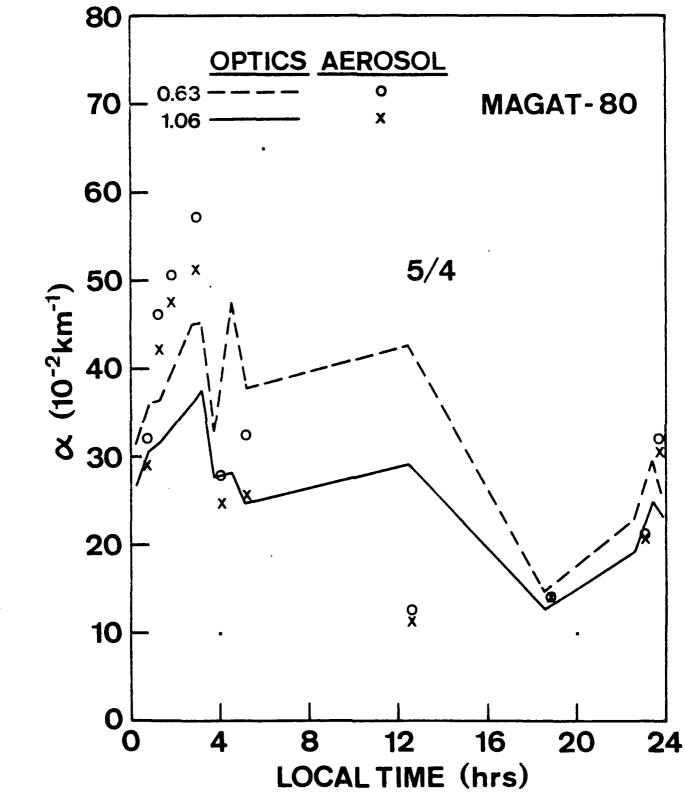

1

Figure Sc. Time series plot of aerosol extinctions coefficient from optical measurements (lines) and aerosol size spectra (X and 0).  $_{18}$ 

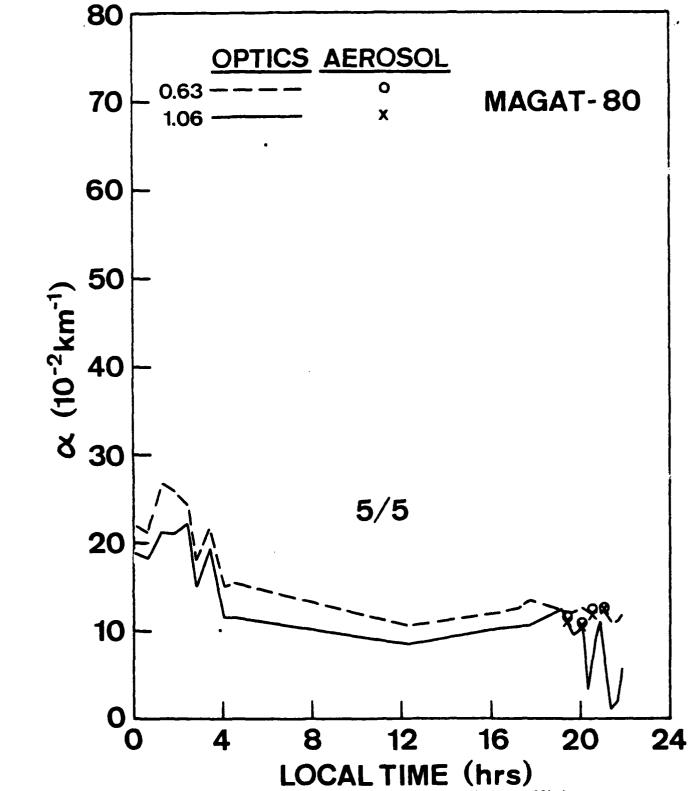


Figure 5d. Time series plot of aerosol extinctions coefficient from optical measurements (lines) and aerosol size spectra (X and 0).

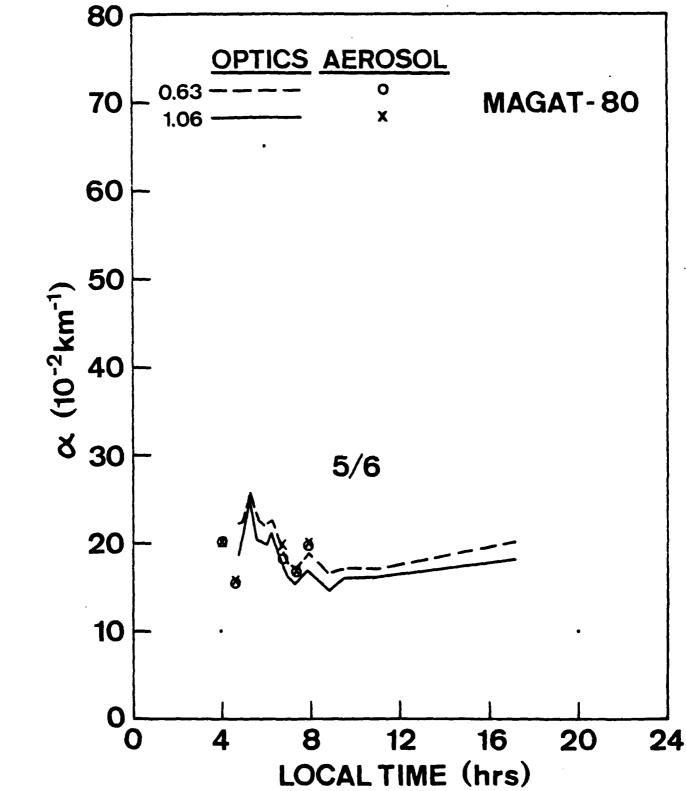


Figure 5e. Time series plot of aerosol extinctions coefficient from optical measurements (lines) and aerosol size spectra (X and 0).

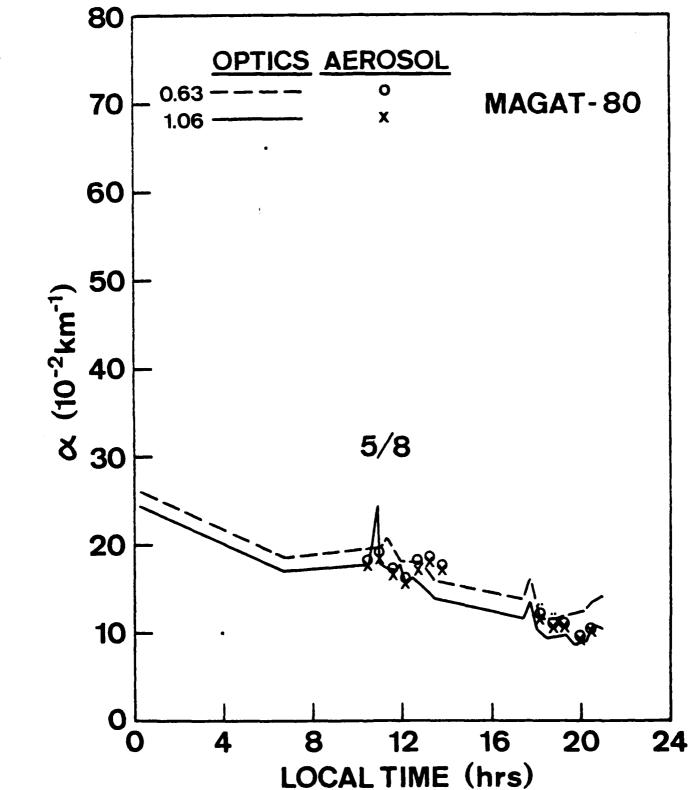


Figure 5f. Time series plot of aerosol extinctions coefficient from optical measurements (lines) and aerosol size spectra (X and 0).

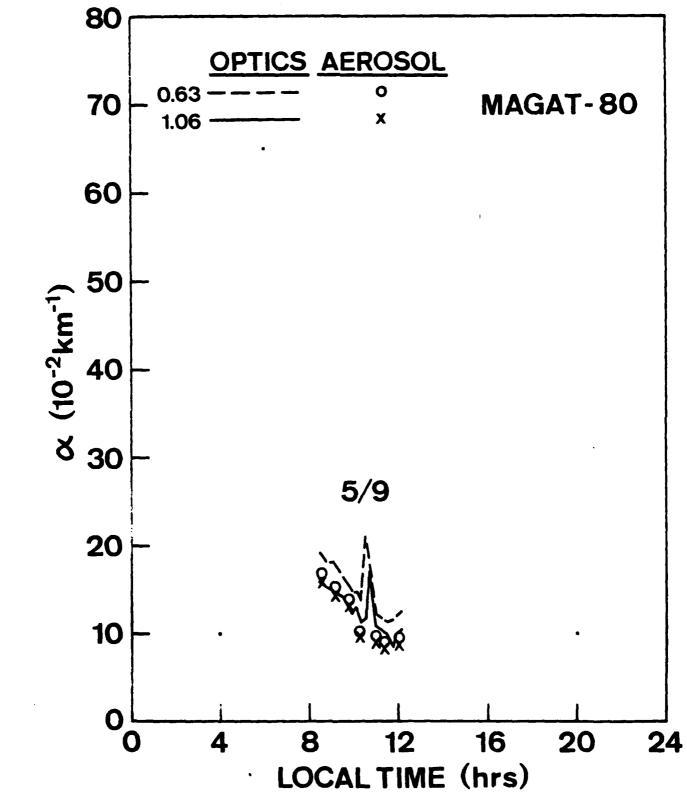


Figure 5g. Time series plot of aerosol extinctions coefficient from optical measurements (lines) and aerosol size spectra (X and 0).

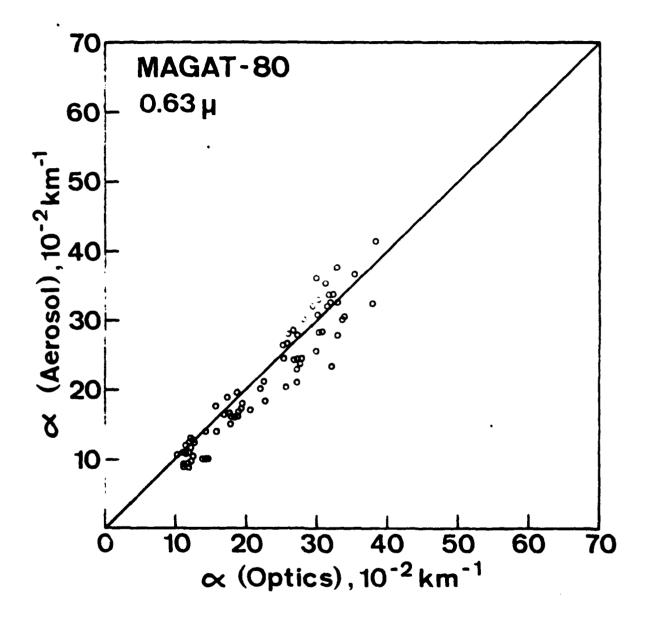


Figure 6a. Comparison of aerosol extinction coefficient from optical and aerosol size spectra measurements at  $\lambda$  = 0.63  $\mu$  .

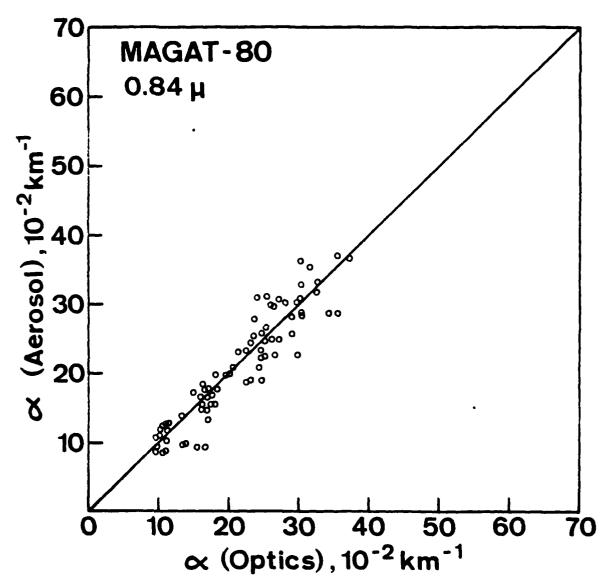


Figure 6b. Comparison of aerosol extinction coefficient from optical and aerosol size spectra measurements at  $\lambda$  = 0.84  $\mu$ .

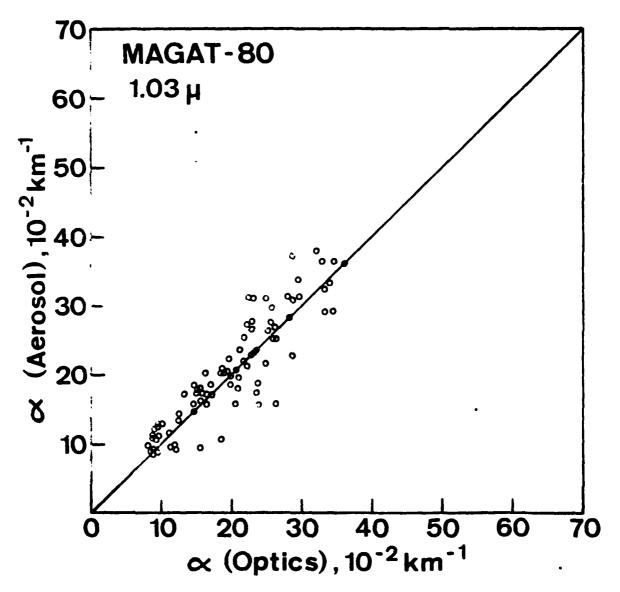


Figure 6c. Comparison of aerosol extinction coefficient from optical and aerosol size spectra measurements at  $\lambda$  = 1.03  $\mu$ .

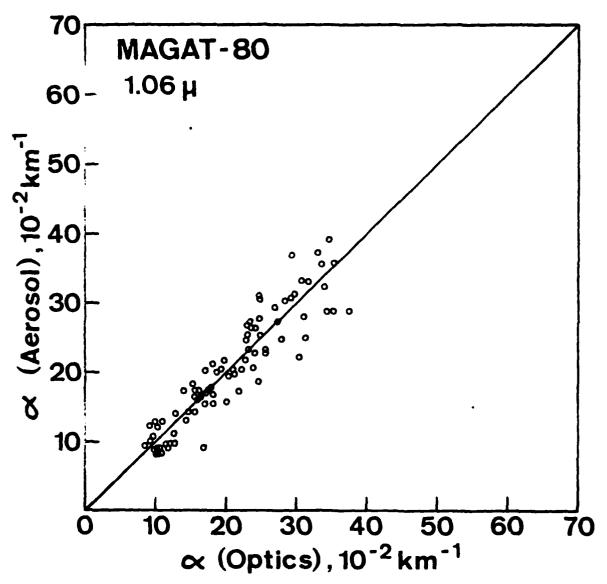


Figure 6d. Comparison of aerosol extinction coefficient from optical and aerosol size spectra measurements at  $\lambda$  = 1.06  $\mu$ .

## APPENDIX A

Aircraft bulk meteorology and turbulence data on optical path in Monterey Bay.

- ALT , Altitude (ft)
- PRES , Pressure (mb)
- T-ROS, Temperature (cent)
- T-SIR, Sea surface temperature (cent)
- T-DEW, Dew point (cent)
- q , Water vapor mixing ratio (g/kg)
- EPS , Turbulence dissipation ratio  $(m^2/\sec^3)$
- CT2 , Temperature structure function  $(K^2/m^2/3)$
- CQ2 , Water vapor structure function  $(mb^2/m^2/3)$
- EXT , Aerosol extinction,  $\lambda = 0.49$  (km<sup>-1</sup>)

H         FORES         L POS         L_SUR         L_OUN         Q         FFS         L_CUP         Q_SURE_OU         Q_SURE_OU <th>7.23E-03 2.15H-01 3.62E-03 2.10E-01 3.46E-03 2.09E-01</th> <th>6.30E-03 3.66E-03 1.92E-03</th> <th>7,46F=03 5,611=03 3,70F=03</th> <th>7.59 7.56 7.54</th> <th>9.95 9.89 9.84</th> <th>14.26 14.17 14.02</th> <th>12.20 12.00 11.92</th> <th>1019.7 1019.0 1018.2</th> <th>10 0.1 0.1</th> <th>175110 175450 175945</th> <th>18 18</th>	7.23E-03 2.15H-01 3.62E-03 2.10E-01 3.46E-03 2.09E-01	6.30E-03 3.66E-03 1.92E-03	7,46F=03 5,611=03 3,70F=03	7.59 7.56 7.54	9.95 9.89 9.84	14.26 14.17 14.02	12.20 12.00 11.92	1019.7 1019.0 1018.2	10 0.1 0.1	175110 175450 175945	18 18
AFT         PRESS         1,593         1,518         7,010         q         FFS         1,593         1,518         7,010         q         FFS         1,12           40         1015.4         12.23         14.23         92.56         2,51         3,794         0.3         6,794         0.3           40         1015.4         12.02         14.13         10.18         7,24         1,241         0.588+04           40         1022.4         13.59         12.86         11.10         8.18         1,764         1         9,588+04           40         1022.4         13.59         13.86         10.19         7,67         5,431-04         1,691-03           40         1022.4         12.03         13.48         10.29         7,67         5,431-04         1,291-03           40         1022.4         12.10         13.48         10.29         7,64         1,975-03         2,51E-03           40         1022.4         13.20         13.48         9,73         7,35         5,25E-94         8,61E-03           40         1022.4         13.59         13.65         10.29         7,71         4,29E-03         1,48E-03           40         1023	4.01	4.986-03	4.67F-03	7.54	9.86	14.00		1020.2	40	123620	<b>∔</b> <1
61 T         PDES         L.FUS         L.SIR         T.DIA         Q         FFC         CDE           40         1017.9         12.23         14.93         9.26         2.54         3.791.03         6.791.03         6.791.03           40         1017.9         12.23         14.13         10.18         7.74         1.211.00         3.70E-03           40         1022.4         13.59         12.86         11.10         8.18         1.761.10         9.58H-04           40         1022.4         13.59         12.86         11.10         8.18         1.761.11         9.58H-04           40         1022.4         13.59         12.86         10.19         7.67         5.84-04         1.69L-03           40         1023.4         12.19         13.42         10.28         7.43         1.97H-03         1.34E-03           40         1023.4         12.10         13.42         10.19         7.69         2.601-03         1.34E-03           40         1023.4         12.10         13.42         10.20         7.71         4.29E-03         1.18E-03           40         1022.3         12.38         14.65         9.74         7.47         6.93E-04 <t< td=""><td>4.808 4.388</td><td>3.04E-03 2.16E-03</td><td>2.30E-02 4.71E-02</td><td>7.08 7.07</td><td>a.98</td><td>13.62 12.67</td><td>12.85 12.78</td><td>1022.6</td><td>33</td><td>164810 165540</td><td>16 16</td></t<>	4.808 4.388	3.04E-03 2.16E-03	2.30E-02 4.71E-02	7.08 7.07	a.98	13.62 12.67	12.85 12.78	1022.6	33	164810 165540	16 16
off         PPES         L_SUS         L_SUR         T_DLB         q         FPC         CLS           40         1017.9         12.24         14.93         9.76         7.51         3.790.03         6.790.0	3.13E	1.95E-03	1,800-02	7.45	9.73	13,29	12.71	1022.9	40	120213	15
AFT         PRES         1,893         1,518         7,910         q         FF         1,13           40         1017.9         12.24         14.93         9.76         7.51         3.791.03         6.790.03           40         1015.4         12.02         14.13         10.18         7.74         1.231.02         3.706.03           40         1022.1         13.59         12.86         11.10         8.18         1.761.14         9.581.04           40         1022.4         13.72         13.87         10.19         7.67         5.84.04         1.691.03           40         1023.4         12.10         13.45         10.28         7.33         3.18E.03         1.291.03           40         1023.4         12.10         13.03         10.19         7.69         2.601.03         1.34E.03           40         1023.4         12.10         13.03         10.19         7.69         2.601.03         1.34E.03           40         1023.4         12.20         13.65         10.20         7.71         4.29E.03         1.34E.03           40         1023.3         12.96         13.21         10.01         7.60         3.99E.03         1.38E.03	1.10E	4.15E-03	8.62E-03	7.35	9.52	13.65	12.76	1022.8	40	91440	14
Fix         PDES         1,895         1,518         7,910         q         FFC         712           FXS         40         4017.9         12.24         14.93         9.76         7.51         3.794.03         6.794.93           M10         40         1015.4         12.02         14.13         10.18         7.24         1.211.02         3.70E-03           M20         40         1024.8         14.78         13.96         10.19         7.67         5.831.04         1.621.03           M20         40         1024.8         14.78         13.96         10.19         7.67         5.831.04         1.621.03           M20         40         1023.4         12.19         13.48         10.28         7.73         3.48.03         1.201.03           M20         40         1023.4         12.10         13.03         10.19         7.69         2.601.03         1.34E-03           M20         40         1023.3         12.94         13.65         10.29         7.59         2.601.03         1.34E-03           M20         40         1022.4         12.46         13.23         10.04         7.69         2.601.03         3.43E-03           M20	1.11E- 1.10E-		1.06E-01 3.61E-02	8,55 8,55	11.27 11.72	13,42	13.80 13.64	1023.0	1 0 40	165219 165536	جو جن بن ب <b>ن</b>
FRY         PRES         L.F.95         L.STR         C.DTW         q         FFC         C.T.2           185         40         1017.5         12.24         14.93         9.76         7.54         3.791.03         6.790.03           350         40         1018.4         12.02         14.13         10.18         7.74         1.241.02         3.706.03           350         40         1022.1         13.59         12.86         11.10         8.18         1.761.42         9.58H-04           350         40         1022.1         13.59         12.86         10.19         7.67         5.35H-04         1.69L-03           350         40         1023.4         12.19         13.48         10.28         7.54         1.97F-03         2.51E-03           3520         40         1023.4         12.10         13.03         10.19         7.69         2.60I-03         1.34E-03           3520         40         1023.4         12.10         13.03         10.19         7.69         2.60I-03         1.34E-03           3520         40         1023.3         12.91         13.03         10.19         7.59         2.60I-03         1.34E-03           3620	3,59E	1.33E-06	8.29E-04	7.77	10.34	14.77	12,38	1022.7	40	8100018	ń
	6.83E-	5.89E-04	6.93F-04	7.47	9.74	14.65	11.58	1021.4	<b>2</b>	94432	<u>;*</u>
FATT PRES 1,893 1,548 1,910 q FFS 1,548 6,79 03  185 40 1017.9 12.24 14.93 9.76 7.51 3.79 03 6.79 03  180 40 1015.4 12.02 14.13 10.18 7.24 1.241.02 5.70E-03  185 40 1022.1 13.59 12.86 11.10 8.18 1.761 14 9.58E-04  1820 40 1024.8 11.78 13.96 10.19 7.67 5.34 03 1.291-03  14.1 40 1023.4 12.19 13.45 10.28 7.73 3.13E-03 1.291-03  1824 40 1023.4 12.10 13.03 10.19 7.69 2.601-03 1.34E-03  1829 40 1023.4 13.20 14.26 9.53 7.35 5.25E-04 8.61E-03  1830 40 1023.3 12.91 13.65 10.20 7.71 4.29E-03 1.18E-03	2.161	3,43E-03	3.99E 03	7.60	10.01	13.21	12,46	1022.4	ĄO	192825	<u>(</u>
ATT         PRES         1,895         1,548         1,910         q         FFG         1,12           AU         1017.9         12.24         14.93         9.76         7.51         3.794.03         6.794.03           MO         40.155.4         12.02         14.13         10.18         7.74         1.241.02         3.79E.03           MO         1022.1         13.59         12.86         11.10         8.18         1.761.10         9.58E.04           MO         1022.1         13.59         12.86         10.19         7.67         5.35.04         1.69E.03           MO         40.24.8         11.78         13.96         10.19         7.67         5.35.04         1.69E.03           MO         40.23.4         12.19         13.12         10.28         7.3         3.13E.03         1.29E.03           MO         40.23.4         12.88         13.48         10.09         7.64         1.97F.03         2.51E.03           MO         1023.4         12.10         13.03         10.19         7.69         2.60F.03         1.34E.03           MO         1023.4         12.10         13.03         10.19         7.69         2.60F.04         8.61E.03 </td <td>3.445-</td> <td>1.18E-03</td> <td>4.29E 03</td> <td>7.71</td> <td>10.20</td> <td>13,65</td> <td>12.91</td> <td>1021.3</td> <td>40</td> <td>164510</td> <td>÷</td>	3.445-	1.18E-03	4.29E 03	7.71	10.20	13,65	12.91	1021.3	40	164510	÷
PRES         1_E9S         1_S1R         1_91 M         q         FFS         FTS           PRES         4.0         1017.9         12.24         14.93         9.76         7.51         3.794.03         6.798.03           10.0         40         1015.4         12.02         14.13         10.18         7.74         1.241.02         5.70E-03           155         40         1022.1         13.59         12.86         11.10         8.18         1.761.1         9.58E-04           520         40         1024.8         11.78         13.96         10.19         7.67         5.85E-04         1.69E-03           520         40         1023.4         12.19         13.12         10.28         7.73         3.13E-03         1.29E-03           524         40         1023.4         12.88         13.48         10.28         7.54         1.97F-03         2.51E-03           528         40         1023.4         12.10         13.03         10.19         7.69         2.60I-03         1.34E-03	4,98E-0	8.61E-04	5.25E-04	7.35	9.53	14,26	11,20	1022.4	<b>&gt;</b>	101320	ထ
HT PRES 1,898 1,818 1,910 q FFC 1,818 1,938 40 1017.9 12.24 14.93 9.76 7.51 3.791.03 6.791 93 150 40 1015.4 12.02 14.13 10.18 7.74 1.211.02 5.70E-03 1555 40 1022.1 13.59 12.86 11.10 8.18 1.761 11 9.58E-04 1550 40 1023.4 12.19 13.59 10.28 7.67 5.451 04 1.691-03 14.2 40 1023.4 12.19 13.45 10.28 7.63 3.14E 03 1.291-03 14.2 40 1022.1 12.08 13.45 10.08 7.64 1.975.03 2.51E-03	1.900-1	1.34E-03	2.601-03	7.69	10.19	13.63	12.10	1023.4	30	190324	7
64 T         PRES         1_E09S         1_S4R         T_D140         q         FFS         FFS <th< td=""><td>3.431 -(</td><td>2.51E-03</td><td>1.978-03</td><td>7.64</td><td>10.08</td><td>13.45</td><td>12.83</td><td>1002.4</td><td><u> </u></td><td>17211</td><td><b>∵</b></td></th<>	3.431 -(	2.51E-03	1.978-03	7.64	10.08	13.45	12.83	1002.4	<u> </u>	17211	<b>∵</b>
## PRES 1,898 1,818 1,910 q FFS 0,74 13.24 14.93 9.76 7.51 3.794-03 6.79 03  ### 40 1017.9 12.24 14.93 9.76 7.51 3.794-03 6.79 03  ### 40 1025.4 12.02 14.13 10.18 7.74 1.211-02 3.70E-03  ### 40 1025.1 13.59 12.86 11.10 8.18 1.761 11 9.58E-04	6.17E-0	1.201-03	3.4 3E 03	7.73	10.28	13.32	12.19	1023.4	40	1 30820	ı٦
HT PRES 1,808 1,818 1,910 q FFS 0.24 0.3 108 40 1017.9 12.24 14.93 9.76 7.51 3.794-03 6.74 03 109 40 1015.4 12.02 14.13 10.18 7.74 1.211-02 3.708-03 188 40 1022.1 13.59 12.86 11.10 8.18 1.761 11 9.588-04	7.741-1	1.691-03	5. KSF -04	7.67	10.19	13.96	11.78	1024.8	40	112320	نڌ
ATT PRES 1,895 1,518 1,910 q FFG 1,718 1,725 40 1017.9 12.24 14.93 9.76 7.51 3.794.03 6.79 03	1.61E	9.58E-04	1.761 11	8.18	11.10	12.86	13.59	1022.1	÷ 0	171855	S.J
ANT PRES 1,805 1,518 T.DIN Q FFS 6129 03	2.761	5.70E-03		7.74	10.18	14.13	12.02	1015.4	à	140010	ΓJ
21.1 SA4 b M (C.) 21.5 [ S03 ] S384 J. M	7.36F-	6.74 03	3.74 03	7.51	9.56	14.93	12.21	1017.9	작 0	175388	,_
	Cup		÷.	£	1 91 W	T STR	564	PRES	1.13	1111	#

		_				
	ひかんこう	<u> </u>	000000	% ~ 1. <b>%</b> ∋ ⊝ © ⊆	19 19 19	÷
114495 114750 115400	100325 100900 101638 102355	185250 190132 190640	180408 180800 181345	125943 130518 130930 131913	104326 104219 105252 110035	1134
10 30 60	10 30 30 10 10	10 30 60	10 30 60 60	10 30 100	50 50 10	01.1
1021.3 1020.8 1019.7	1021.4 1020.8 1019.8 1018.5	3022.4 1021.5 1020.4	1022.4 1021.5 1021.1 1021.2	1024.6 1023.9 1022.8 1021.7	1023.3 1023.1 1023.1 1022.5	PRES
14.13 14.19 14.07	13.78 13.70 13.65 12.83	12.65 12.57 12.36	12.50 12.58 12.43 12.39	59 60	*,67 *,67 *,68	S08 1
14.45	15.22 14.82 14.59	14.03 13.85 13.74	13.71 14.18 13.68 12.93	15.05 14.71 14.90 13.50	16.00 15.79 15.62 14.60	ATS_L
11.26 11.20 11.14	11.14 11.05 10.83 11.33	30.03 9.84 9.74	10.14 9.88 9.87 9.98	9,43 9,35 9,22 9,04	9.32 9.16 9.13 9.10	M NO 1
8.28 8.23	8.21 8.16 8.05 8.34	7.61 7.52 7.48	7.67 7.54 7.54 7.59	7.29 7.26 7.20 7.42	7.24 7.17 7.11 7.11	g
1.4%E-02 7.7%E-03 5.22E-03	4.76E-11 4.49E-11 4.27E-11 4.06E-11	4.05E-02 1.79E-02 1.21E-02	3,14E-02 2,16E-02 1,20E-02 2,77E-02	8.11E-03 4.24E-03 2.97E-03 5.62E-03	4.36E-03 2.45E-03 1.61E-03 3.41E-03	843
5.61E-04 5.39E-04 3.18E-04	2.14E-03 8.40E-04 6.57E-04 8.86E-04	8.03E-04 4.21E-04 2.47E-04	6.62E-04 5.55E-04 3.43E-04 6.30E-04	4.02E-04 2.41E-04 2.15E-04 1.87E-04	5.87E-04 3.62E-04 2.18E-04 1.67E-04	217
2.61E-02 1.61E-02 1.45E-02	3.19L-02 2.45E-02 1.76E-02 3.15E-02	9.81E-01 1.42E 01 9.68E-02	2.20E-01 1.50E-02 1.11E-02 2.51E-02	9.69E-03 3.67E-03 3.02E-03 2.87E-03	1,44L-02 9,35L-03 6,86E-03 6,66E-03	(JI)
5,88E-02 6,39E-02 6,28F-02	6,401-02 6,72E-02 6,36E-02 1,52E-01	6.54E-02 6.46E-02 6.50E-02	8.04E-02 7.36E-02 7.23E-02 6.91E-02	1.51E-01 1.11E-01 1.14E-01 1.14E-01	1.78L 03 1.23L-01 1.39E-03 1.23E-01	131

## APPENDIX B

Summary of aircraft optical measurements in Monterey Bay.

ALT , Altitude (ft)

PRES , Pressure (mb)

T-ROS , Temperature (cent)

T-DEW , Dew point (cent)

CN2T ,  $\text{C}_{\text{T}}^{2}$  component of  $\text{C}_{\text{N}}^{2}~(\text{m}^{-2/3})$ 

 ${\rm CN2}$  , Turbulence value of  ${\rm C_N}^2~({\rm m}^{-2/3})$ 

E(.63), Aerosol extinction  $(Km^{-1})$  at  $\lambda = 0.63$ 

E(.84) , Aerosol extinction (Km<sup>-1</sup>) at  $\lambda$  = 0.84

E(1.06), Aerosol extinction (Km<sup>-1</sup>) at  $\lambda = 1.06$ 

1.1E-01 9.8E-02 1.0E-01	1.4E-01 1.3E-01 1.3E-01	1.8E-01 1.8E-01 1.8E-01	6.2E-15 3.6E-15 1.9E-15	6.2E-15 3.6E-15 1.9E-15	9.95 9.89 9.84	12.20 12.00 11.92	1019.7 1019.0 1018.2	10 30 60	175110 175450 175945	ត្ត ភេក្ខ	08720750 08720750 08736750
1,2E-01	1.5E-01	2.0E-01	4.9E-15	4.9E-15	9.86	12,24	1020.2	40	123620	17	05/07/80
8.1E-02 9.2E-02	1.0E-01 1.1E-01	1.3E-01 1.SE-01	3.0E-15 2.1E-15	3.0E-15 2.1E-15	8.98 8.95	12.86 12.78	1022.6 1022.8	40	164810 165540	16 16	05/06/80 05/06/80
7.5E-02	9.5E-02	1.2E-01	1.9E-15	1.9E-15	9.73	12.71	1022.9	40	120213	<u>_</u>	05/44/80
6.8E-02	8.9E-02	1.2E-01	4.1E-15	4.15-15	9.52	12.76	1022.8	40	91440	10	05/06/89
9.9E-02 4.4E-02	7.3E-02 5.6E-02	9.1E-02 7.2E-02	2.0E-15 6.6E-16	1.8E-15 6.3E-16	11.77 11.72	13.80 13.64	1023.0 1022.2	3.0 40	165219 165536	1 N	08/20/20 08/05/80
9.4E-02	1.26-01	1.6E-01	8.6E-18	1.3E-18	10.34	12.38	1022.7	40	100018	S	08/05/90
8,7E-92	1.18-01	1.4E-01	7.2E-16	5.86-16	9.74	11.58	1021.4	40	94432		05/04/80
7.3E-02 5	9.76-02	1.3E-01	3.4E-15	3.45-15	10.01	12.46	1022.4	40	192825	<u>ئ</u> ت	05/03/80
1.1E-01	1.5E-01	2,2E-01	1.26-15	1.26-15	10.20	12.91	(021.3	40	3.64510	<del>-</del> -\$	03763780
3.0E-02	4.2E-02	5.9E-02	1,9E-15	8.55-16	5.816	11.20	1022.4	40	101320	Φ	08/03/80
20-35.S	3.1E-02	4.4E-02	1.3E-15	1.36-15	10.19	12.10	1023.4	30	190324	. *	08/00/20
2.4E~02	3.3E-02	4.9E-02	2.5E-15	2.56-15	10.08	12.08	1022.4		172112	÷	0.25.65.780
2.9E-00	4.45-02	7.5E-02	1.3E-15	1.38-35	10.28	12.19	1023.4	<b>4</b> 0	4.49529		98 (98 SB
4.76-02	6.16-02	8.3F-02	1.76-15	1.78-45	10.19	14,78	1024.8	40	\$ 1 - 7 0	_	0.5 (0) 5.0
5.02.03	8.1103	1.4E-02	9.5E-16	9,58-16	13.30	13.59	1022 1	4 7	3.53.004.57		0.5 10 50
8.56-02	1.16~01	1.5E-01	3.6E-15	3.60-15	10.18	12.02	1015.4	40	142010	-	085-05-20
7.2E-02	2.71-02	1.3E-91	6.7E-15	6.9-45	9.76	12.24	1917.9	40	T 301 %	<u></u>	0.2
1 1 1 1 1 1 6 1	E7.84)	F3.639	CMS	CM2+	M 160 L	7 ROS	T-1215-5	101.0	1113	79	6411

2.5E-02	3.5E-02	5.0E-02	3.4E-16	3.1E-16	11.14	14.07	1019.7	60	115400	ال ال	05/09/30
	3.5E-02	5.1E-02	6E -16	5.3E-16	11.20	14.19	1020.8	30	114750	יטר 101	08/99/80
<b>&gt;</b>	3.25-02	4.6E-02	1E-16	S.SE-16	11.26	14.13	1021.3	0.3	114405	25	08/09/80
9.7E-02	1 E - 0 1	1.3E-01		8.7E-16	11.33	12.83	1018.5	100	102455	ار ن	08/09/80
2,71-02	20 18	5.65-06		0.35.10	20.73	1.5.65	1017.8	. 50	101038		0.57.0.57.80
				107		* 5		\ 0 3 0	100730	3 ·	01 100 210
C.U	4 F ∩ ∵	パ パロー D ひ		7.1	4 4 95	4 × 70	1000 B	 C	10000	∵ <b>-</b> >	00/00/90
3.0E-02	3,9E-02	5.2E-02	2.2E-15	2.15-15	11.14	13.78	1021.4	<u>د</u> ت	100325	: U 4	08/09/80
 5. UE-UZ		5.35-02		2.4E-16	7./4	12.36	1020.9	<b>5</b>	170690	<u>^</u>	0.27.037.80
			- ;		] (			\		1	000000000000000000000000000000000000000
3.08 - 02		S. 4E-02	16	<b>↑</b> . 2E - 1.6	9.84	12.57	1021.5	Ģ ⊕	190132	ru ⊶	05/03/8n
3.0E-02	3.9E-02	5.4E-02	2.8E-15	7.9E-16	10.03	fp. 65	1022.4	10	185750	10 (x)	08/88/80
3.4E-02	20	5.96-02		6.2k-16	9,78	12.39	1021.2	61)	181940	N.	08/80/80
0.75	94.	0.10		0-35	7.07	10.4	TACTAL	0	101040		00/00/00
7 OF 180	ີ ປ	A 4 E 0.5		7 AE - 1 A	C : 27	- · · · · · · · · · · · · · · · · · · ·	\$ 0 U A	> : O	> 0	J (	05/00/06
3.75-02	0 N	6.2E-02		5.5E .16	ج. 33		1021.5	3.0	5 3 0 6 6 0	ru ru	08789780
4.26-02		6.9E-02		6.5E-16	10.14	12.50	1022.4	3.0	380408	73 73	08/30/30
5.6E-02	20	9.91:-02	1.91-16	1.8116	9.04	*.61	1021.7	100	131913	₹3 0	08/80/20
5.7E-02	÷0.2	9.7E-02	2.2E-16	2.1E-16	\$.22 22	-, 60	1022.8	<u>် 0</u>	130930	) <u> </u>	08/88/80
5.31 - 92	S	9.4E-02	2.5E-16	2.41-16	9.35	59	1023.9	30	130518	, ; <u>o</u>	0.87.687.50
6.75-02		1.3E-01	4.21-16	4.0E-16	9,43	· . 58	1024.6	10	125943	2.0	08/295/20
4.50-02	6.41 02	9.6E-02	1.81.46	1.71:-16	9.10	:. 68	1023.1	50	110035	19	08/88/80
7.8E-02	9.40-02		2.36.16	2,26-16	9.03	: , 7:8 :-	1022.5	60 60	105252	- - - -	0.87.087.80
5.81 .02	7.50-02		3.91-16	3.6E-16	9.16	· . 67	1023.1	30	104719	19	03788780
6. 20 02	7.9E 02		5.11, 16	5.8E 16	9.32	~ . 67	1023.3	1.0	104320	्	08/80/80
1 (1,06)	E(.84)	1 (163)	68.	1360	H.10 J	) ROS	PRI S	AL.T	11111	7₩	41.90

## BIBLIOGRAPHY

- 1. Crittenden, E. C., Milne, E. A., Cooper, A. W., Rodeback, G. W. and S. H. Kalmbach (1980): "Cverwater Optical Scintillation Measurements During MAGAT-80", Technical Report NPS-61-80-018.
- 2. Davidson, K. L., Schacher, G. E., Fairall, C. W., and D. E. Spiel (1980): "Verification of the Bulk Model for Calculations of the Overwater Index of Retraction Structure Function,  ${\rm C_N}^{2\pi}$ , Technical Report NPS-61-80-016.
- 3. Fairall, C. W. (1979): "Aircraft Measurements of Micrometeorological Parameters at Panama City, Florida, in 1978", Technical Report BDM/M-008-79.
- 4. Fairall, C. W. (1980a): "An Aircraft Study of Turbulence Dissipation and Temperature Structure Function in the Unstable Marine Atmospheric Surface Layer", Technical Report BDM/M-004-80.
- 5. Fairall, C. W. (1980b): "Estimation of  ${\rm C_N}^2$  from Bulk Meteorology" Technical Report BDM/-009-80.
- 6. Schacher, G. E., Davidson, K. L. and C. W. Fairall (1980): "Optical Aerosol Spectrometers Factors Affecting Optical Extinction Predictions", Technical Report NPS-61-80-013.
- 7. Selby, J. E., Kneizys, F. X., Chetwynd, J. H., and R. A. McClatchey (1978) \*Atmospheric Transmittance/Radiance: Computer Code LDWTRAD-4", Technical Report AFGL-TR-78-0053.

## DISTRIBUTION LIST

	-	201.	No.	of	Copies
1.	Defense Documentation Cameron Station Alexandria, Virginia			2	
2.	Library, Code 0142 Naval Postgraduate Sch Monterey, California			2	
3.	Dean of Research, Code Naval Postgraduate Sch Monterey, California	nool		1	
4.	Dr. C.W. Fairall BDM Corporation, 1340 Monterey, California			4	
5.	Professor J. Dyer, Coo Naval Postgraduate Sch Monterey, California	nool		1	
6.	Professor G.J. Haltine Naval Postgraduate Sch Monterey, California	nool		1	
7.	Assoc. Professor K.L. Naval Postgraduate Sch Monterey, California	nool		4	
8.	Professor G.E. Schache Naval Postgraduate Sch Monterey, California	nool		10	
9.	Professor E.C. Critter Naval Postgraduate Sch Monterey, California	nool		1	
10.	Dr. J. H. Richter Code 532 Naval Ocean Systems Co San Diego, California			1	
11.	Dr. Lothar Ruhnke Code 8320 Naval Research Laborat Washington, D.C. 2037			1	
12.	Dr. D. Jensen Code 5322 Naval Oceans Systems ( San Diego, California			1	

13.	Code 5332 Naval Ocean System Center San Diego, California 92152	1
14.	Dr. J. Fitzgerald Code 8326 Naval Research Laboratory Washington, D.C. 20375	1
15.	Dr. Richard Jeck Code 8323 Naval Research Laboratory Washington, D.C. 20375	1
16.	Dr. G. Trusty Code 5568 Naval Research Laboratory Washington, D.C. 20375	1
17.	Dr. A. Shlanta Code 3173 Naval Weapons Center China Lake, California 93555	1
18.	Dr. Barry Katz Code R42 Naval Surface Weapons Center White Oak Laboratory Silver Spring, Maryland 20362	1
19.	Mr. Eugene J. Mack Calspan Corporation Buffalo, New York 14221	1
20.	Dr. R. Knollenberg Particle Measurements, Inc. 1855 South 57th Ct. Boulder, Colorado 80301	1
21.	Mr. G. Mathews Code 1232 Pacific Missile Test Center Point Mugu, California 93042	1
22.	Mr. J. Rosenthal Code 3253 Pacific Missile Test Center Point Mugu, California 93042	1
23.	CDR K. Van Sickle Code Air-370 Naval Air Systems Command Washington, D.C. 20360	1

24.	LT Gary Ley PMS-405 Naval Sea Systems Command Washington, D.C. 20360	1
25.	Dr. A. Goroch Naval Environmental Research Prediction Facility Monterey, California 93940	1
26.	Dr. S. Burk Naval Environmental Research Prediction Facility Monterey, California 93940	1
27.	Mr. G. Spalding Code 08T23 Naval Material Command Washington, D.C. 20362	1
28.	Dr. Jenkins Code 370C Naval Air Systems Command Washington, D.C. 20360	1
29.	Dr. J. MacCallum Code 6509 Naval Research Laboratory Washington, D.C. 20375	1
30.	Dr. P.B. Ulrich Code 6560 Naval Research Laboratory Washington, D.C. 20375	1
31.	Dr. J. Wunderlich Code 39403 Naval Weapons Center China Lake, CA 93555	1
32.	Mr. L. Biberman Institute for Defense Analysis 400 Army-Navy Drive Arlington, Virginia 22202	1
33.	Dr. Paul Twitchell Office of Naval Research 666 Summer Street Boston, Massachusetts 02210	1
34.	Dr. M. White Office of Naval Research 666 Summer Street Boston, Massachusetts 02210	1

35.	Dr. H. Holt Atmospheric Science Laboratory White Sands Missile Range White Sands, New Mexico 88022	1
36.	Dr. F. Niles Atmospheric Science Laboratory White Sands Missile Range White Sand, New Mexico 88022	1
37.	Dr. Paul Twitchell Office of Naval Research 666 Summer Street Boston, Massachusetts 02210	1

